

PK Series Fishpond Submersible Pump

50 Hz

Power: 150 W

Head: Up to 6 M

Flow: Up to 220 L/min

Outlet: 2"

60 Hz

Power: 100 ~ 250 W

Head: Up to 6.5 M

Flow: Up to 260 L/min

Outlet: 1" or 2"



Construction
Industry



Agriculture/
Fishing Industry



Manufacturing
Industry



Wholesale
& Retail Industry



Technology
Industry




Service
Industry



Accommodation
& Food Service
Activities



WALRUS fit

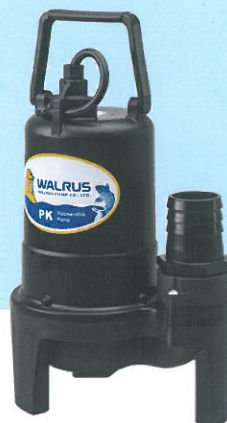

Product Features

- High efficiency motor.
- Motor with thermal overload protector.
- Pump body is made of engineering plastic.

Applications

- Circulating water in fish ponds.
- Fountain.
- Waterfall.
- Lifting water from tanks.

Operating Conditions

- Insulation class: B
- Protection: IP68
- Length of cable: 4 or 5 M
10 M (Optional)
- Liquids Temperature: 4°C ~ +35°C
- Min.Submerged depth: 12 ±1 cm
- Solids Passage : 20 mm