

# TH Series Atomize Pump



**Power:** 0.25 - 0.37 kW

**50Hz**

**Pressure:** Up to 30 kg/cm<sup>2</sup>

**Flow:** Up to 7.5 L/min

**60Hz**

**Pressure:** Up to 30 kg/cm<sup>2</sup>

**Flow:** Up to 8.5 L/min

**Outlet:** 1/4"

## Applications

1. Household and industrial washing and cleaning.
2. High pressure water supplying.
3. Garden and agricultural chemicals spraying.
4. Hydraulic piping leakage testing.

## Maximum output pressure

1. TH400P - 30 kg/cm<sup>2</sup>
2. TH250P - 20 kg/cm<sup>2</sup>

## Standard Accessories



1. Suction hose pipe with inlet filter.
2. High pressure hose (30 ft.)
3. Overflow hose.
4. Spray gun.

## Product Features

1. Portable compact design, easy to carry.
2. Easy operation, and maintenance.
3. High pressure discharge head, and large capacity.
4. Powerful electrical motor, high reliability.
5. Suitable for agricultural spraying.
6. Self priming suction function.

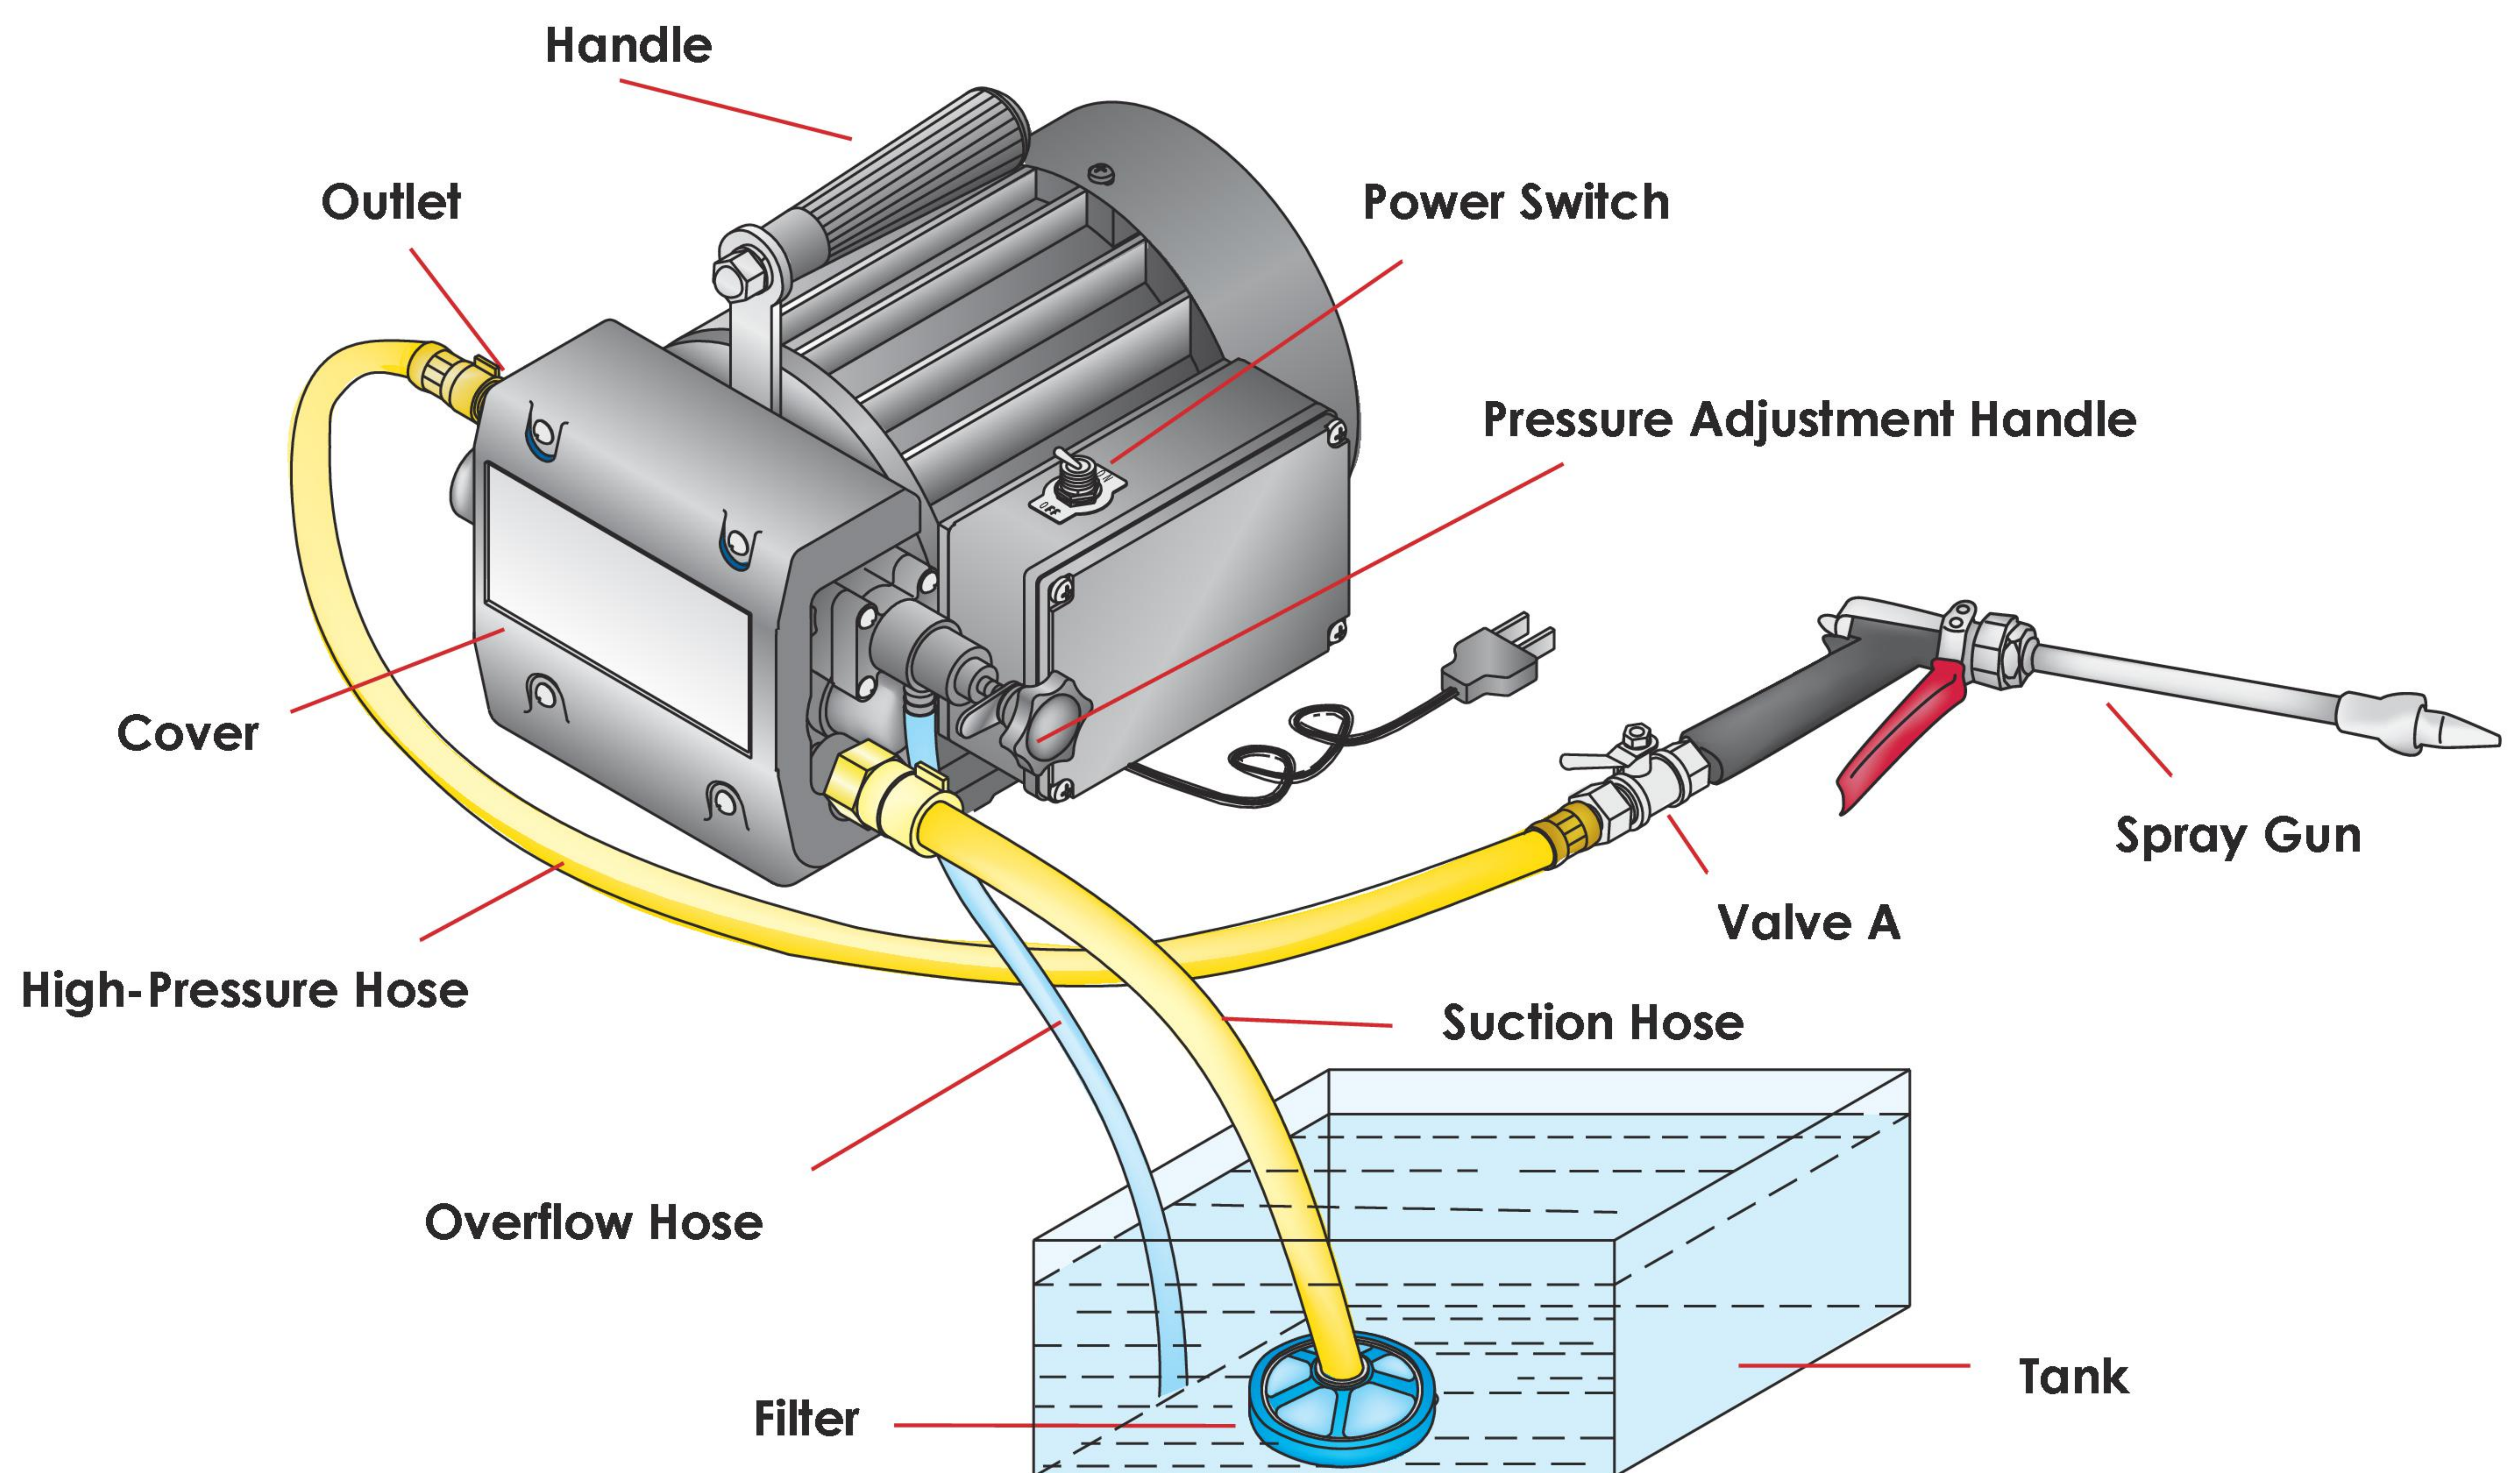
## Optional Accessories



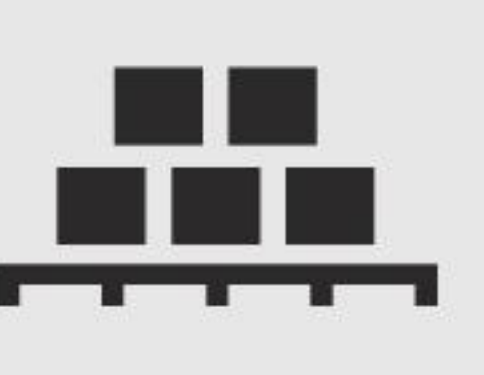
Hydraulic testing kit  
(pressure gauge, valve and high pressure hose pipe ).



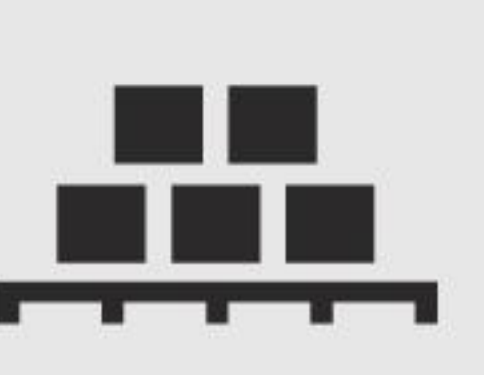
## Sprayer Components



## Specification, 50Hz

Type	Output (kW)	Cycle Hz	Pole P	Voltage Single V	Amp's A	Pressure kg/cm <sup>2</sup>	Capacity L/min	Box Outline L x W x H mm	Weight kg	
TH250P	0.25	50	4	200 - 240	2.0	20	7.5	358 X 288 X 261	9.0	24
TH400P	0.37	50	4	200 - 240	4.4	30	7.5	358 X 288 X 261	13.2	24

## Specification, 60Hz

Type	Output (kW)	Cycle Hz	Pole P	Voltage Single V	Amp's A	Pressure kg/cm <sup>2</sup>	Capacity L/min	Box Outline L x W x H mm	Weight kg	
TH250P	0.25	60	4	110 / 220	6.0 / 3.0	20	8.5	358 X 288 X 261	9.0	24
TH400P	0.37	60	4	110 / 220	8.6 / 4.3	30	8.5	358 X 288 X 261	13.2	24